

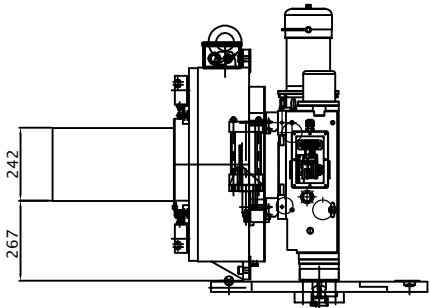


deta <i>International</i>			
Magazine Model	MC5A(#50X32T)	CamBox Model	#50(90)
Pocket Spec.	#50(90°)	Arm Radius(mm)	A50C R=300
Mag. Indexing Time	0.75 sec/pocket(at 60Hz)4P	Tool Change Time	2.45 SEC(at 60Hz) (cambox only)
	1.50 sec/pocket(at 60Hz)8P		
	0.90 sec/pocket(at 50Hz)4P		2.95 SEC(at 50Hz)
	1.80 sec/pocket(at 50Hz)8P		
Tool Weight (Kgf)	Max: 15 Avg: 10 Total: 320	Net. Weight (Kgf)	850 kgf
Maximum Tool Dia.	Ø125/Ø229		

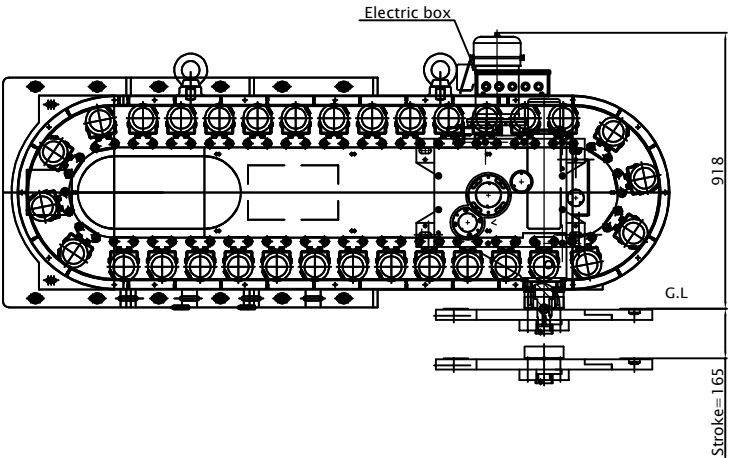

deta <i>International</i>			
Magazine Model	MC5AQ(#50X32T)	CamBox Model	#50(60)
Pocket Spec.	#50(60°)	Arm Radius(mm)	A50C R=300
Mag. Indexing Time	0.75 sec/pocket(at 60Hz)4P	Tool Change Time	2.45 SEC(at 60Hz) (cambox only)
	1.50 sec/pocket(at 60Hz)8P		
	0.90 sec/pocket(at 50Hz)4P		2.95 SEC(at 50Hz)
	1.80 sec/pocket(at 50Hz)8P		
Tool Weight (Kgf)	Max: 15 Avg: 10 Total: 320	Net. Weight (Kgf)	850 kgf
Maximum Tool Dia.	Ø125/Ø229		

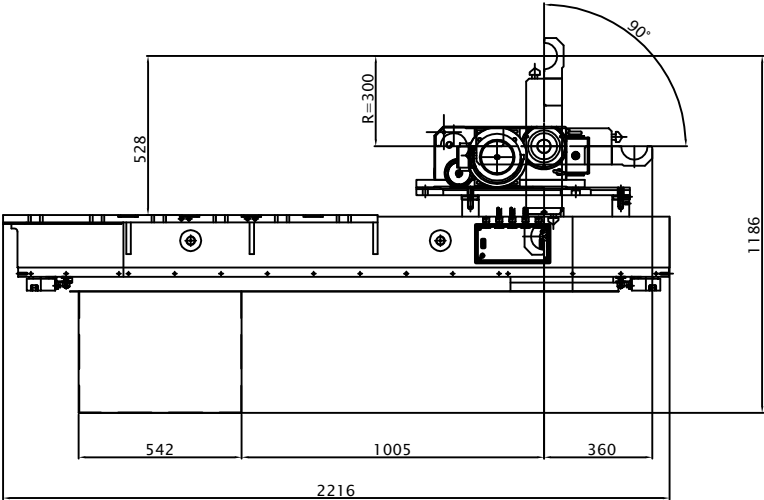